



Z-Stuff for Trains

Making model railroading more fun



DZ-1040/ 1050/ 1060/ 1080 Instructions


The signal only needs the RED wire connected to power (12-18V AC or DC) and the BLACK wire connected to common. Place the signal next to the track about 1-1/8" away from the outside rail. Facing the front of the signal, the train is detected on the LEFT side. The sensor will not reach across more than one track. If more sensitivity is needed to detect black rolling stock, try rotating the sensitivity adjustment clockwise. When the train passes the signal, the indication will change to RED or stop and hold until the train has passed. 4 seconds after the train passes, the signal will change to YELLOW or caution. Then, after 2-3 more seconds, it will change back to GREEN or go.

The signal only needs power to operate, but it does have an input (YELLOW) and an output (WHITE) for additional possibilities.

OPTION A – If the WHITE wire of a signal down-track is connected to the YELLOW wire of an up-track signal, the up-track signal will hold on caution (YELLOW) until the down-track signal goes off stop (RED).

OPTION B – The WHITE wire can be connected to the GREEN wire of a DZ-1008 relay module. The RED wire of the DZ-1008 should be connected to the same power as the signal and the BLACK wire connected to common. The signal will then cause the relay to change when the signal goes to stop (RED) and the relay will change back when the signal goes off stop to caution (YELLOW).

OPTION C – If the sensor is covered with black tape, then the input (YELLOW) wire can be used to control the sensor. Connecting the input wire to common will cause the signal to indicate stop (RED). With the wire not connected, the signal will time-out and go to yellow, then green.

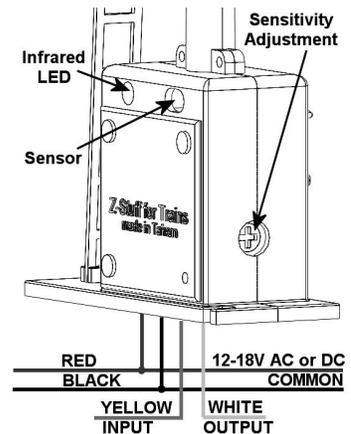

Check our website for applications and use of signals with our DZ-2500.

