



Ross Double Crossover DZ-1000 & DZ-1002 Wiring

Z-Stuff for Trains
2-23-02

Switch machines should be mounted in these positions. In this setup, when 'L' is connected to common, all switches are straight thru. When 'R' is connected to common, all switches are to turnout.

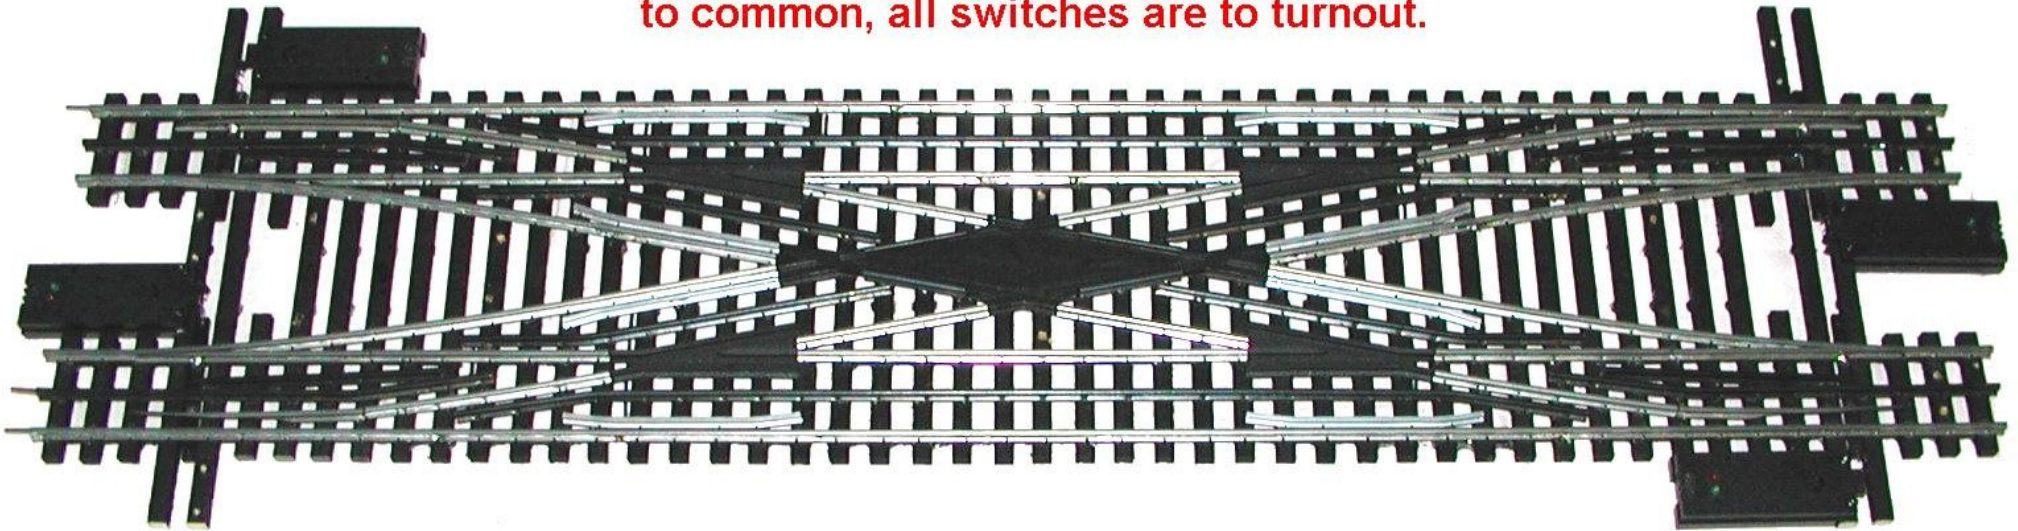

A single DZ-1002 remote can control all (4) DZ-1000 switch machines. Pressing 'L' button will throw ALL switches to straight thru. Pressing 'R' button will throw all switches to crossover.



DZ-1000s (4)

AC- connect all to 12VAC

L - connect all to L of DZ-1002

R - connect all to R of DZ-1002

DZ-1002 (1)

C - connect to Common

L - connect to 'L's

R - connect to 'R's